

AL Samhan Pumps SP Series

General Purpose Single Stage Straight Centrifugal Pumps




General Specification

- Heavy-duty cast iron pump casing and back mechanical seal plate and brass material for impeller.
- Heavy-duty mechanical seal resist chemical material (Viton material for rubber material).
- Driven by heavy duty electric motor imported from famous companies of USA & European countries, has double voltages 220/440V 60 Hz. This makes the pump suitable for industrial, agriculture application and irrigation. Furthermore, stainless steel shaft is considered for shaft material for corrosive media.
- Easy servicing motor and pump, where four bolts were used to mount the motor on pump casing for easy disassemble and maintains Process.
- Pump casing has a 2" BSP suction inlet and 1 ½" BSP delivery outlet ports.
- Overall dimension 220(width) x 235(height) x 455(length) mm.

Characteristic head/flow table

Pump Model	Voltage/Ph	HP/Hz	Amp				
SP-3	230/460V/3 ph	3.0/60Hz	11-5.2				
Q : CAPACITY (l/min)							
300	272	252	240	220	132	72	0
Head in meter							
7	15	21	26	31	40	42	44

Characteristic head/flow curve

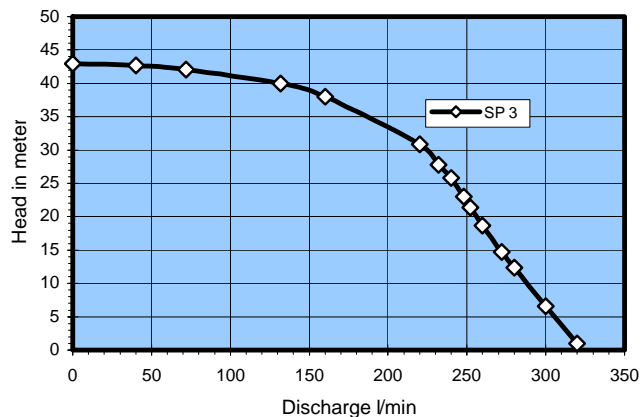

AL SAMHAN FACTORY FOR SAUDI PUMP CO., LTD.,

2ND Industrial Area, P.O.Box 1139, Riyadh 11431, Saudi Arabia
 Tel 00966-1-4023274, 4982244, 4982255. Fax 00966-1-4044081, 4982266.

Email asamhan@cyberia.net.sa / info@samtax.com Web Site www.samtax.com